

Features

- Low Forward Voltage Drop
- Guard Ring Construction for Transient Protection
- High Conductance
- Also Available in Lead Free Version



SOD-123 top view



Schematic diagram



Marking and pin assignment



Pb-Free



Halogen-Free

Maximum Ratings($T_a=25^{\circ}\text{C}$ unless otherwise noted)

Symbol	Parameter	Value	Unit
V_R	Reverse Voltage	30	V
V_{RRM}	Maximum recurrent peak reverse voltage		
V_{RWM}	Working Peak Reverse Voltage		
$V_{R(RMS)}$	RMS Reverse Voltage	21	V
I_O	Average Rectified Output Current	0.5	A
I_{FSM}	Non-repetitive Peak Forward Surge Current@ $t=8.3\text{ms}$	5.5	A
P_D	Power Dissipation	500	mW
$R_{\theta JA}$	Thermal resistance junction to ambient air	200	$^{\circ}\text{C/W}$
T_J	Operating Junction Temperature Range	$-40\sim+125$	$^{\circ}\text{C}$
T_{stg}	Operation Junction and Storage Temperature Range	$-55\sim+150$	$^{\circ}\text{C}$
dv/dt	Voltage rate of change	1000	$\text{V}/\mu\text{s}$





ELECTRICAL CHARACTERISTICS($T_a=25^{\circ}\text{C}$ unless otherwise specified)

Symbol	Parameter	Condition	Min	Typ	Max	Unit
$V_{(BR)}$	Reverse voltage	$I_R=200\mu\text{A}$	30	--	--	V
I_R	Reverse voltage leakage current	$V_R=15\text{V}$	--	--	20	μA
		$V_R=30\text{V}$	--	--	130	
V_F	Forward voltage	$I_F=0.1\text{A}$	--	--	0.375	V
		$I_F=0.5\text{A}$	--	--	0.43	
C_{tot}	Total capacitance	$V_R=1, f=1\text{MHz}$	--	170	--	pF


Ordering Information (Example)

Type	Package	Marking	Minimum	Inner Box	Outer	Delivery
B0530W	SOD-123	SE	3,000	45,000	180,000	7"reel

Typical Operating Characteristics

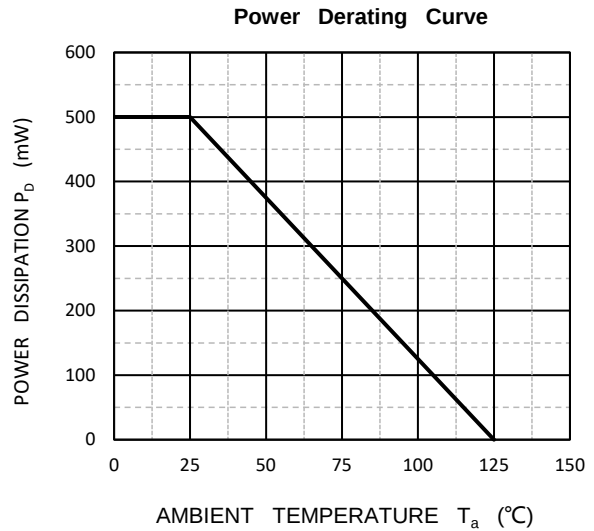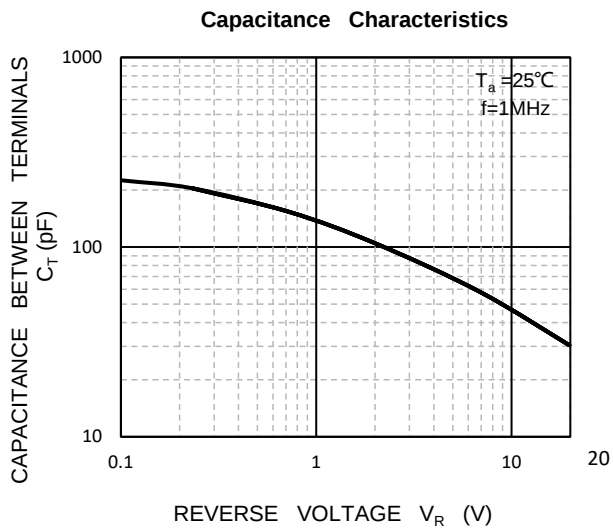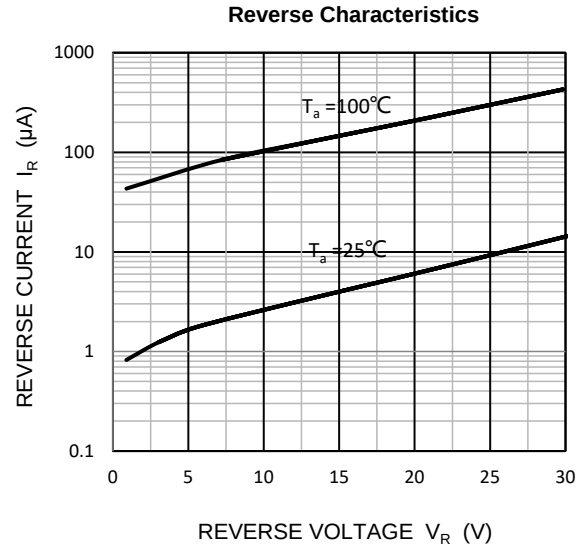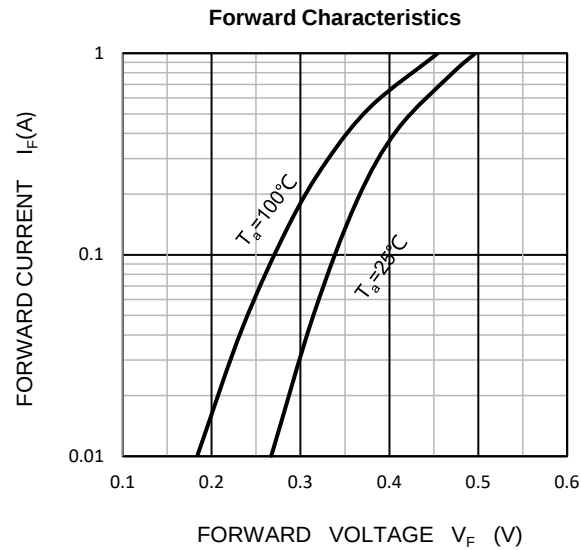

SOD-123 Package information

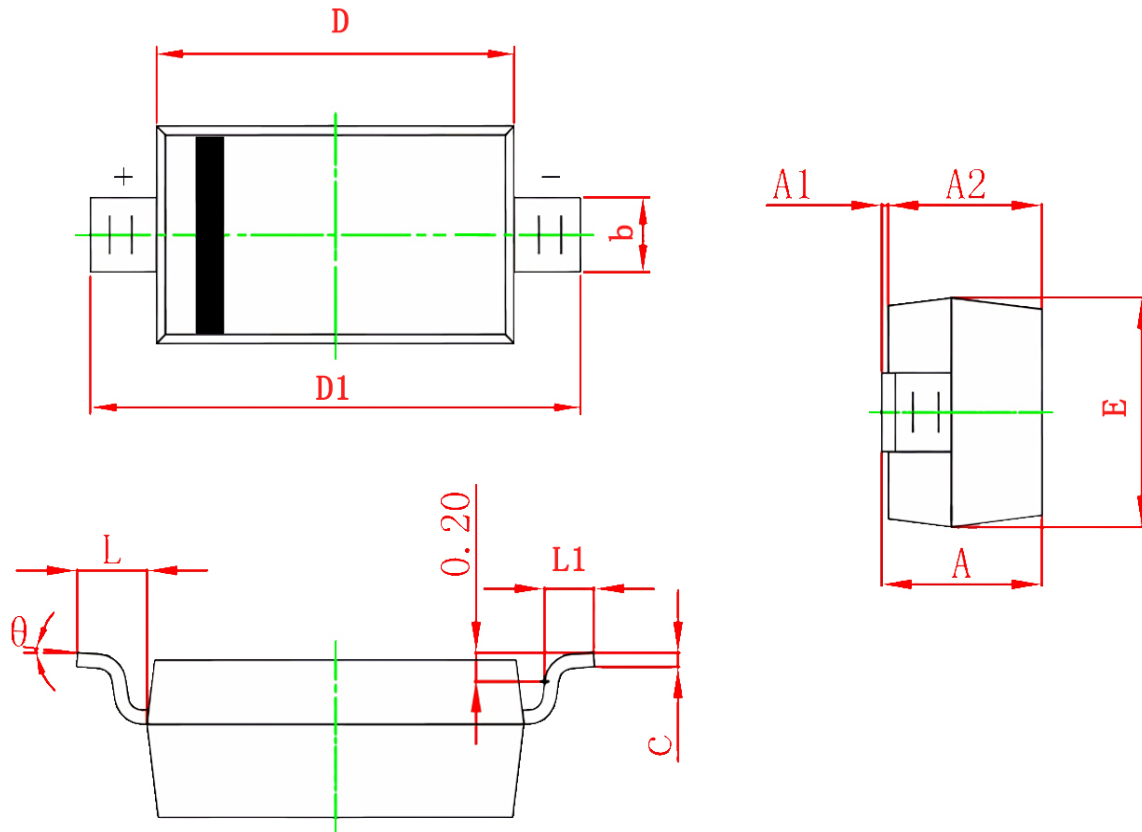

Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.050	1.150	0.041	0.045
b	0.450	0.650	0.018	0.026
c	0.080	0.150	0.003	0.006
D	2.600	2.800	0.102	0.110
D1	3.550	3.850	0.140	0.152
E	1.500	1.700	0.059	0.067
L	0.500 REF		0.020 REF	
L1	0.250	0.450	0.010	0.018
θ	0°	8°	0°	8°