

Features


- High power and current handling capability
- Lead free product is acquired
- Surface mount package

Application

- Battery protection
- Load switch
- Power management


Product Summary

V_{DS}	$R_{DS(ON)}$ MAX	I_D MAX
30V	12mΩ@10V	30A
	15mΩ@4.5V	
-30V	25mΩ@-10V	-30A
	30mΩ@-4.5V	




Marking and pin assignment

MCPD30A : Device code
XXXX : Code

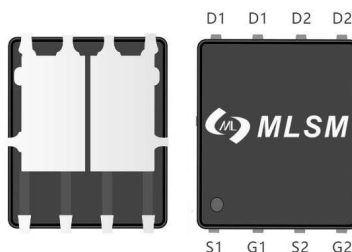

PDFN5X6-8L view



Schematic diagram



Pb-Free



Halogen-Free

Absolute Maximum Ratings (TA=25°C unless otherwise noted)

Symbol	Parameter	N-Channel	P-Channel	Unit
--------	-----------	-----------	-----------	------

Common Ratings (TC=25°C Unless Otherwise Noted)

V_{DS}	Drain-Source Breakdown Voltage	30	-30	V
V_{GS}	Gate-Source Voltage	±20	±20	V
T_J	Maximum Junction Temperature	150	150	°C
T_{STG}	Storage Temperature Range	-55 to 150	-55 to 150	°C
I_S	Diode Continuous Forward Current	30	-30	A
	$T_C=25^\circ\text{C}$			

Mounted on Large Heat Sink

I_{DM}	Pulse Drain Current Tested	$T_C=25^\circ\text{C}$	120	-120	A
I_D	Continuous Drain Current	$T_C=25^\circ\text{C}$	30	-30	A
P_D	Maximum Power Dissipation	$T_C=25^\circ\text{C}$	45	45	W
$R_{\theta JA}$	Thermal Resistance Junction-Ambient		75	75	°C/W

Ordering Information (Example)

Type	Package	Marking	Minimum Package(pcs)	Inner Box Quantity(pcs)	Outer Carton Quantity(pcs)	Delivery Mode
MCPD30A	PDFN5X6-8L	MCPD30A	5,000	10,000	70,000	13"reel



N-CH Electrical Characteristics (TJ=25°C unless otherwise noted)						
Symbol	Parameter	Condition	Min	Typ	Max	Unit
Static Electrical Characteristics @ TJ = 25°C (unless otherwise stated)						
BV _{(BR)DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =250μA	30	--	--	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =30V, V _{GS} =0V	--	--	1	μA
I _{GSS}	Gate-Body Leakage Current	V _{GS} =±20V, V _{DS} =0V	--	--	±100	nA
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =250μA	1.0	1.5	2.5	V
R _{DS(on)}	Drain-Source On-State Resistance	V _{GS} =10V, I _D =20A	--	9	12	mΩ
		V _{GS} =4.5V, I _D =15A	--	11	15	mΩ
Dynamic Electrical Characteristics @ TJ = 25°C (unless otherwise stated)						
C _{ISS}	Input Capacitance	V _{DS} =15V, V _{GS} =0V, f=1MHz	--	853	--	pF
C _{OSS}	Output Capacitance		--	106	--	pF
C _{RSS}	Reverse Transfer Capacitance		--	82	--	pF
Switching Characteristics						
Q _g	Total Gate Charge	V _{DD} =15V, I _D =20A, V _{GS} =10V	--	16	--	nC
Q _{gs}	Gate Source Charge		--	3.6	--	nC
Q _{gd}	Gate Drain Charge		--	3.4	--	nC
t _{d(on)}	Turn-on Delay Time	V _{DD} =15V, I _D =20A, V _{GS} =10V, R _G =3Ω	--	6	--	nS
t _r	Turn-on Rise Time		--	15	--	nS
t _{d(off)}	Turn-Off Delay Time		--	17	--	nS
t _f	Turn-Off Fall Time		--	5	--	nS
Source- Drain Diode Characteristics						
V _{SD}	Forward on voltage	Tj=25°C, Is=10A	--	0.8	1.2	V

P-CH Electrical Characteristics (TJ=25°C unless otherwise noted)						
Symbol	Parameter	Condition	Min	Typ	Max	Unit
Static Electrical Characteristics @ TJ = 25°C (unless otherwise stated)						
BV _{(BR)DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =-250μA	-30	--	--	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =-30V, V _{GS} =0V	--	--	-1	μA
I _{GSS}	Gate-Body Leakage Current	V _{GS} =±20V, V _{DS} =0V	--	--	±100	nA
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =-250μA	-1.0	--	-2.5	V
R _{DS(on)}	Drain-Source On-State Resistance	V _{GS} =-10V, I _D =-20A	--	18	25	mΩ
		V _{GS} =-4.5V, I _D =-10A	--	22	30	mΩ
Dynamic Electrical Characteristics @ TJ = 25°C (unless otherwise stated)						
C _{ISS}	Input Capacitance	V _{DS} =-15V, V _{GS} =0V, f=1MHz	--	895	--	pF
C _{OSS}	Output Capacitance		--	166	--	pF
C _{RSS}	Reverse Transfer Capacitance		--	135	--	pF
Q _g	Total Gate Charge	V _{DS} =-15V, I _D =-10A, V _{GS} =-10V	--	10	--	nC
Q _{gs}	Gate Source Charge		--	2.5	--	nC
Q _{gd}	Gate Drain Charge		--	3	--	nC
Switching Characteristics						
t _{d(on)}	Turn-on Delay Time	V _{DS} =-15V, I _D =-10A, V _{GS} =-10V, R _G =2.5Ω	--	16.5	--	nS
t _r	Turn-on Rise Time		--	20	--	nS
t _{d(off)}	Turn-Off Delay Time		--	55	--	nS
t _f	Turn-Off Fall Time		--	10	--	nS
Source- Drain Diode Characteristics						
V _{SD}	Forward on voltage	Tj=25°C, Is=-10A	--	--	-1.2	V

N-Channel Typical Operating Characteristics

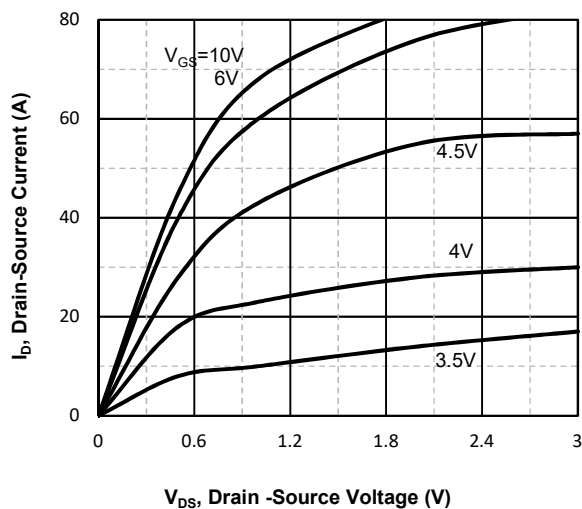


Fig1. Typical Output Characteristics

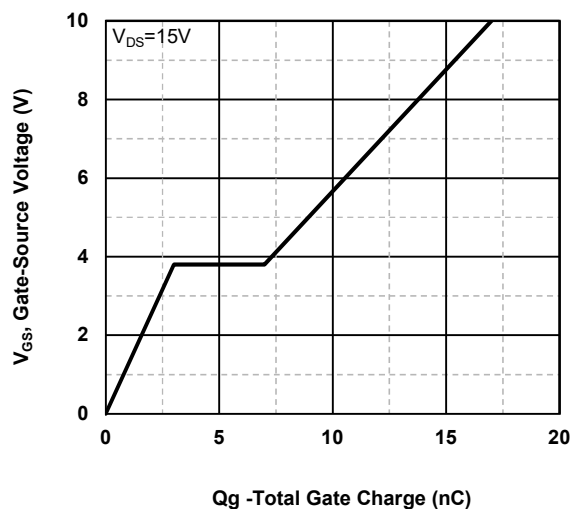


Fig2. Typical Gate Charge Vs. Gate-Source Voltage

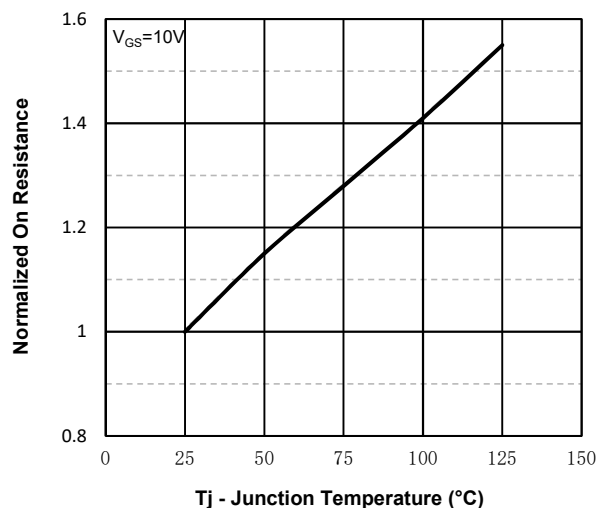


Fig3. Normalized On-Resistance Vs. Temperature

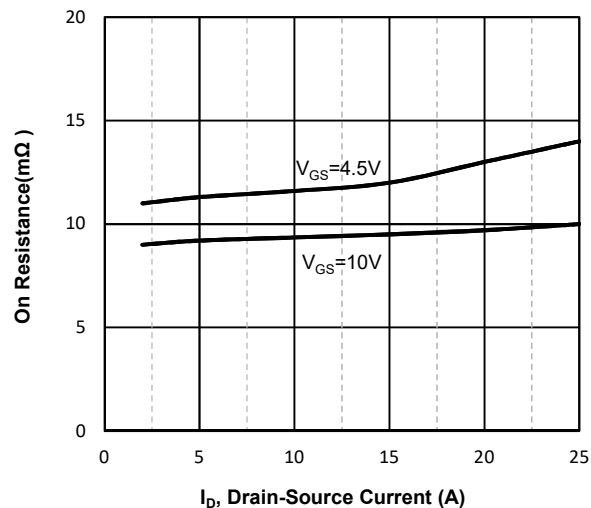


Fig4. On-Resistance Vs. Drain-Source Current

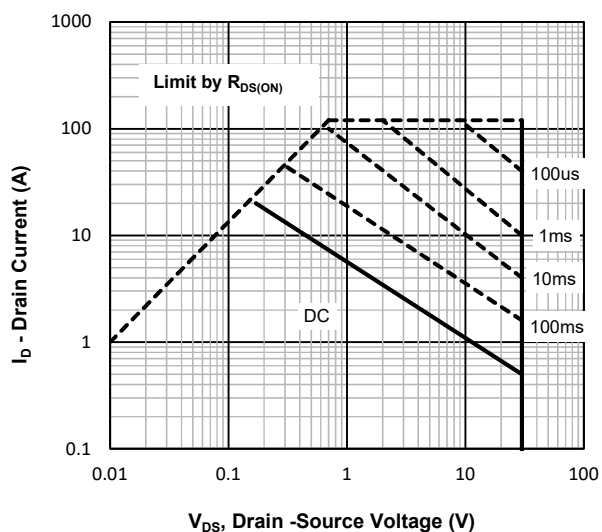


Fig5. Maximum Safe Operating Area

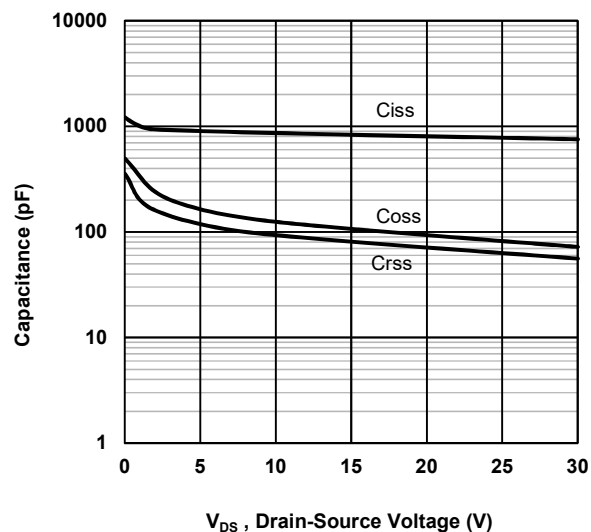


Fig6 Typical Capacitance Vs. Drain-Source Voltage

P-Channel Typical Operating Characteristics

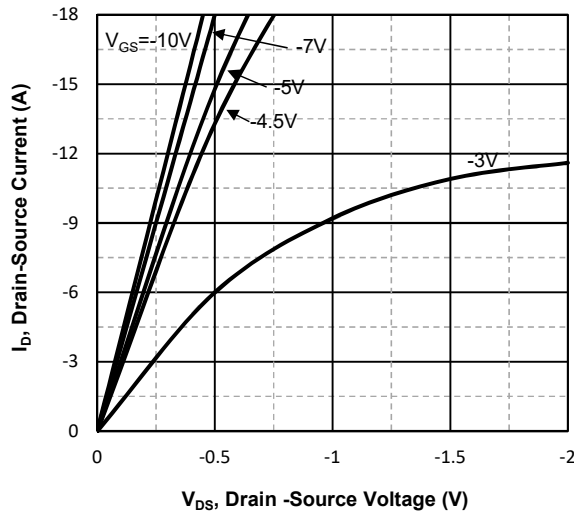


Fig7. Typical Output Characteristics

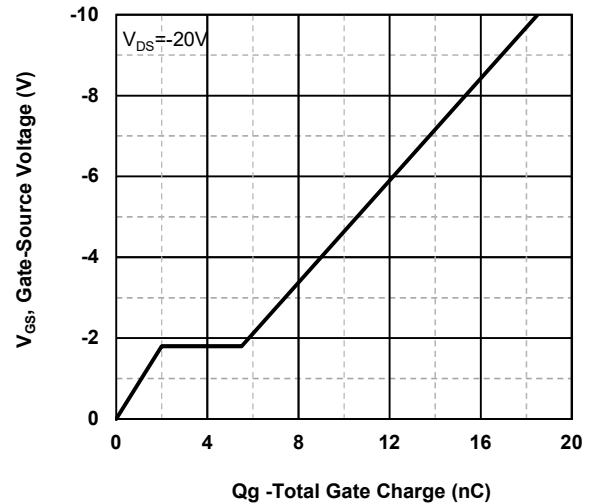


Fig8. Typical Gate Charge Vs. Gate-Source Voltage

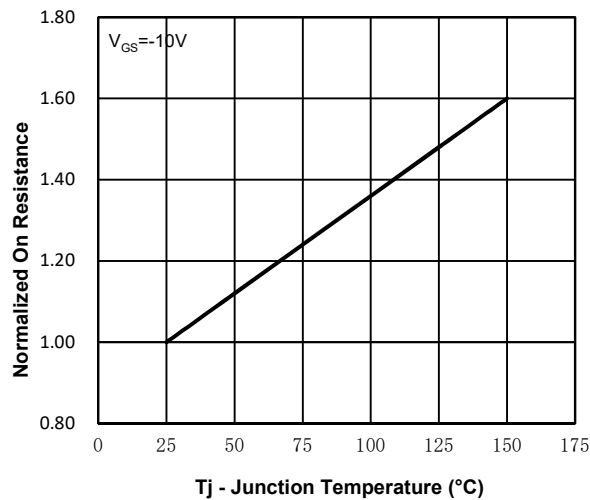


Fig9. Normalized On-Resistance Vs. Temperature

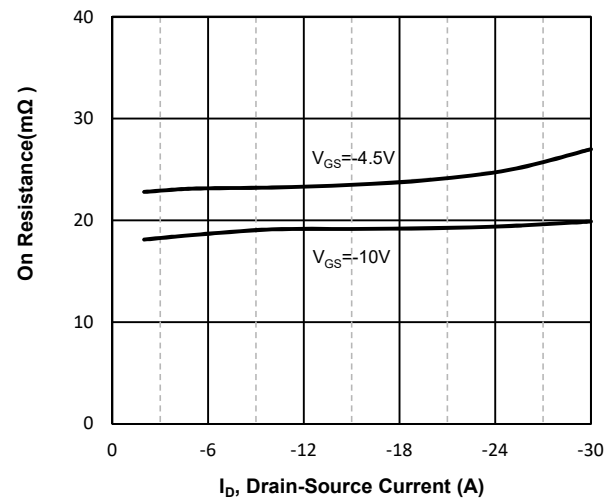


Fig10. On-Resistance Vs. Drain-Source Current

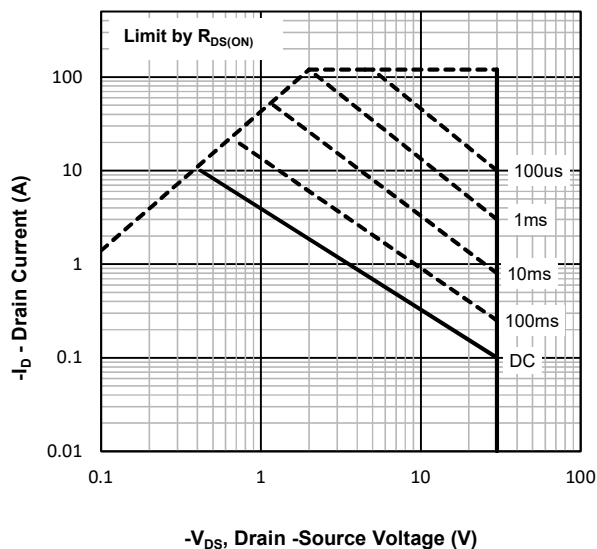


Fig11. Maximum Safe Operating Area


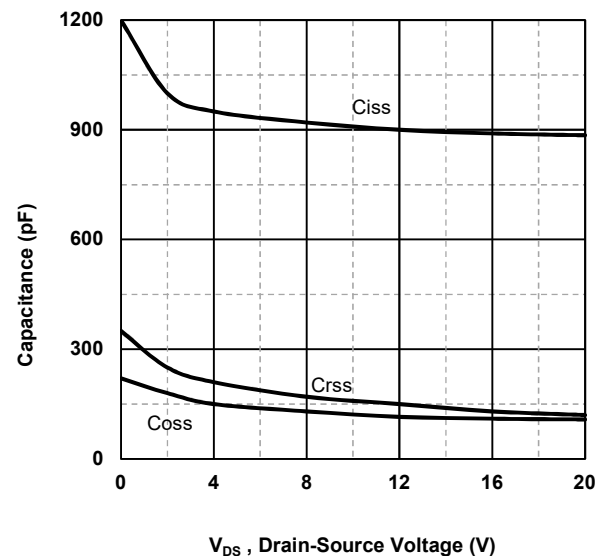


Fig12. Typical Capacitance Vs. Drain-Source Voltage

PDFN5X6-8L Package information

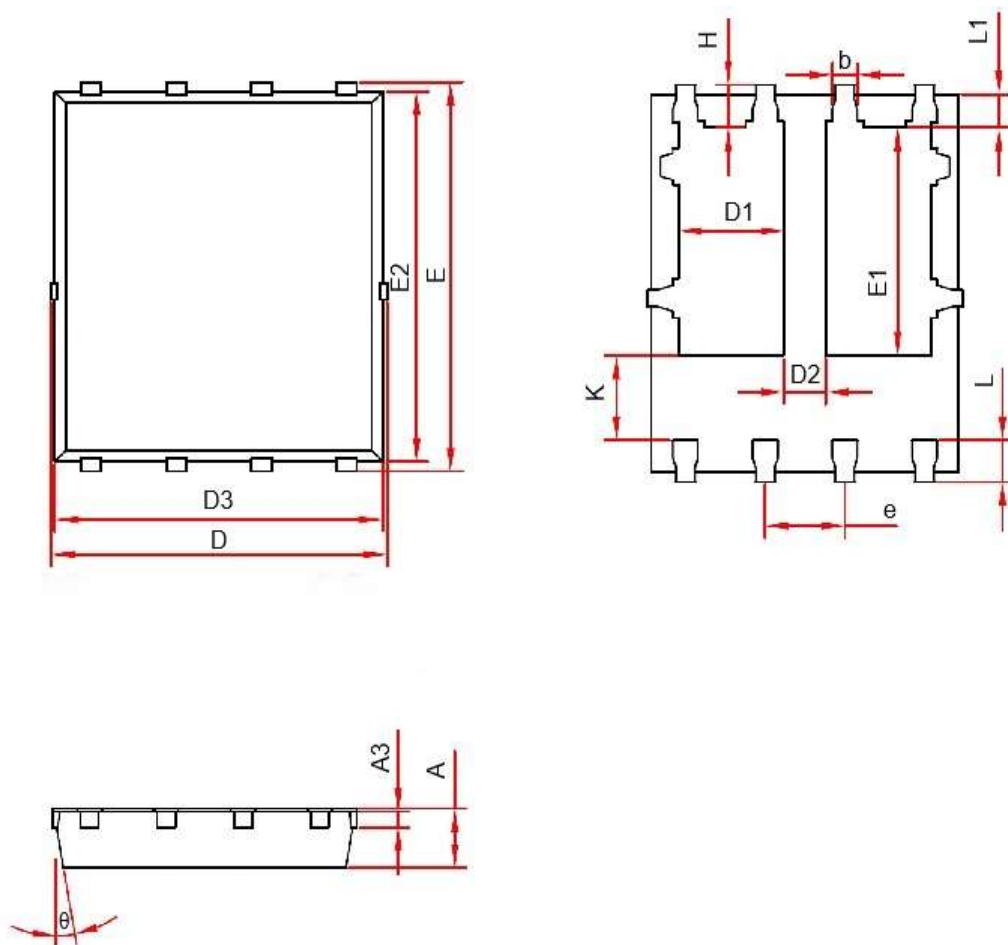

Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	0.950	1.050	0.035	0.039
A3	0.254REF.		0.010REF.	
D	4.950	5.050	0.196	0.200
E	5.950	6.050	0.235	0.239
D1	1.470	1.870	0.058	0.074
D2	0.470	0.870	0.019	0.034
E1	3.510	3.610	0.139	0.143
D3	4.850	4.950	0.192	0.196
E2	5.700	5.800	0.225	0.229
k	1.190	1.390	0.047	0.055
b	0.300	0.400	0.012	0.016
e	1.270TYP.		0.050TYP.	
L	0.559	0.711	0.022	0.028
L1	0.424	0.576	0.017	0.023
H	0.574	0.726	0.023	0.029
θ	10°	12°	10°	12°