

Features


- High power and current handing capability
- Lead free product is acquired
- Surface mount package

Application

- Battery protection
- Load switch
- Power management

Product Summary

V_{DS}	$R_{DS(ON)}$ TYP	I_D
60V	30m Ω @10V	20A
	38m Ω @4.5V	
-60V	55m Ω @-10V	-20A
	66m Ω @-4.5V	



MEPG20A : Device code
XXXX : Code



PDFN3X3-8L view



Schematic diagram



Halogen-Free

Marking and pin assignment

Absolute Maximum Ratings (TA=25°C unless otherwise noted)					
Symbol	Parameter		N-Channel	P-Channel	Unit
Common Ratings (TC=25°C Unless Otherwise Noted)					
V_{DS}	Drain-Source Breakdown Voltage		60	-60	V
V_{GS}	Gate-Source Voltage		±20	±20	V
T_J	Maximum Junction Temperature		150	150	°C
T_{STG}	Storage Temperature Range		-55 to 150	-55 to 150	°C
I_S	Diode Continuous Forward Current	Tc=25°C	20	-20	A
Mounted on Large Heat Sink					
I_{DM}	Pulse Drain Current Tested	Tc=25°C	80	-80	A
I_D	Continuous Drain Current	Tc=25°C	20	-20	A
P_D	Maximum Power Dissipation	Tc=25°C	35	35	W
$R_{\theta JA}$	Thermal Resistance Junction-Ambient		65	65	°C/W

Ordering Information (Example)						
Type	Package	Marking	Minimum Package(pcs)	Inner Box Quantity(pcs)	Outer Carton Quantity(pcs)	Delivery Mode
MEPG20A	PDFN3X3-8L	MEPG20A	5,000	10,000	70,000	13"reel

N-CH Electrical Characteristics (TJ=25℃ unless otherwise noted)						
Symbol	Parameter	Condition	Min	Typ	Max	Unit
Static Electrical Characteristics @ TJ = 25℃ (unless otherwise stated)						
BV _{(BR)DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =250μA	60	--	--	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =60V, V _{GS} =0V	--	--	1	μA
I _{GSS}	Gate-Body Leakage Current	V _{GS} =±20V, V _{DS} =0V	--	--	±100	nA
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =250μA	1.0	1.7	2.5	V
R _{DS(on)}	Drain-Source On-State Resistance	V _{GS} =10V, I _D =20A	--	30	38	mΩ
		V _{GS} =4.5V, I _D =10A	--	38	50	mΩ
Dynamic Electrical Characteristics @ TJ = 25℃ (unless otherwise stated)						
C _{ISS}	Input Capacitance	V _{DS} =30V, V _{GS} =0V, f=1MHz	--	1020	--	pF
C _{OSS}	Output Capacitance		--	70	--	pF
C _{RSS}	Reverse Transfer Capacitance		--	60	--	pF
Switching Characteristics						
Q _g	Total Gate Charge	V _{DS} =30V, I _D =20A, V _{GS} =10V	--	26.5	--	nC
Q _{gs}	Gate Source Charge		--	5.5	--	nC
Q _{gd}	Gate Drain Charge		--	6.5	--	nC
t _{d(on)}	Turn-on Delay Time	V _{DD} =30V, I _D =20A, V _{GS} =10V, R _G =2.3Ω	--	10	--	nS
t _r	Turn-on Rise Time		--	20	--	nS
t _{d(off)}	Turn-Off Delay Time		--	30	--	nS
t _f	Turn-Off Fall Time		--	21	--	nS
Source- Drain Diode Characteristics						
V _{SD}	Forward on voltage	Tj=25℃, Is=20A	--	--	1.2	V

P-CH Electrical Characteristics (T_J=25°C unless otherwise noted)

Symbol	Parameter	Condition	Min	Typ	Max	Unit
--------	-----------	-----------	-----	-----	-----	------

Static Electrical Characteristics @ T_J = 25°C (unless otherwise stated)

BV _{(BR)DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =-250μA	-60	--	--	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =-60V, V _{GS} =0V	--	--	-1	μA
I _{GSS}	Gate-Body Leakage Current	V _{GS} =±20V, V _{DS} =0V	--	--	±100	nA
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =-250μA	-1.0	-1.7	-2.5	V
R _{DS(on)}	Drain-Source On-State Resistance	V _{GS} =-10V, I _D =-20A	--	55	72	mΩ
		V _{GS} =-4.5V, I _D =-10A	--	66	90	mΩ

Dynamic Electrical Characteristics @ T_J = 25°C (unless otherwise stated)

C _{ISS}	Input Capacitance	V _{DS} =-30V, V _{GS} =0V, f=1MHz	--	2105	--	pF
C _{OSS}	Output Capacitance		--	112	--	pF
C _{RSS}	Reverse Transfer Capacitance		--	98	--	pF







Switching Characteristics

Q _g	Total Gate Charge	V _{DS} =-30V, I _D =-20A, V _{GS} =-10V	--	46.2	--	nC
Q _{gs}	Gate Source Charge		--	8.6	--	nC
Q _{gd}	Gate Drain Charge		--	10.4	--	nC
t _{d(on)}	Turn-on Delay Time	V _{DS} =-30V, I _D =-20A, V _{GS} =-10V, R _G =3Ω	--	10	--	nS
t _r	Turn-on Rise Time		--	6	--	nS
t _{d(off)}	Turn-Off Delay Time		--	45	--	nS
t _f	Turn-Off Fall Time		--	13	--	nS







Source- Drain Diode Characteristics

V _{SD}	Forward on voltage	T _J =25°C, I _S =-20A	--	--	-1.2	V
-----------------	--------------------	--	----	----	------	---


N-Channel Typical Operating Characteristics

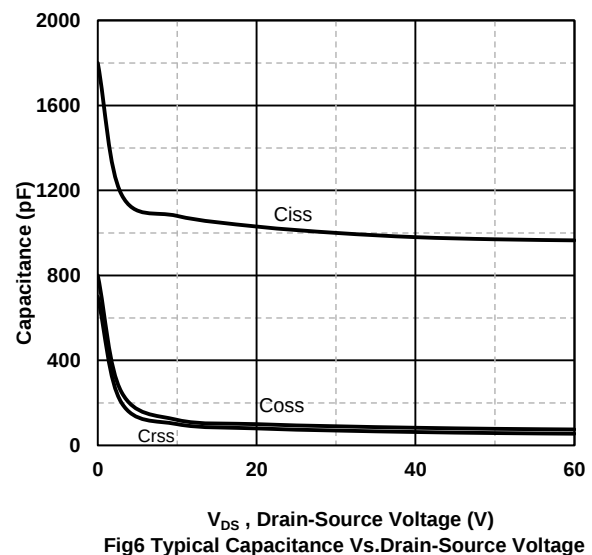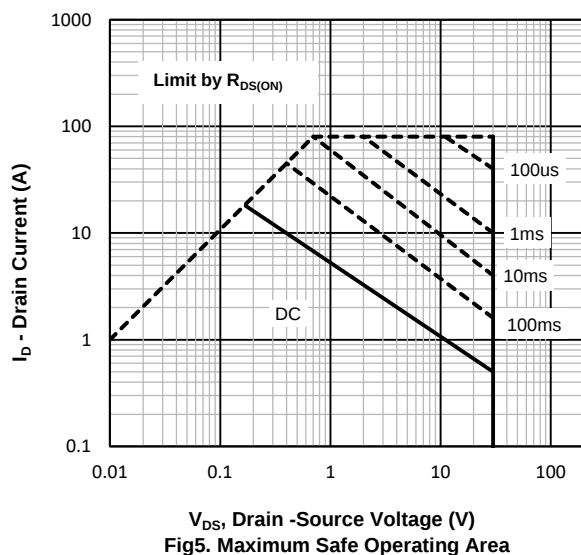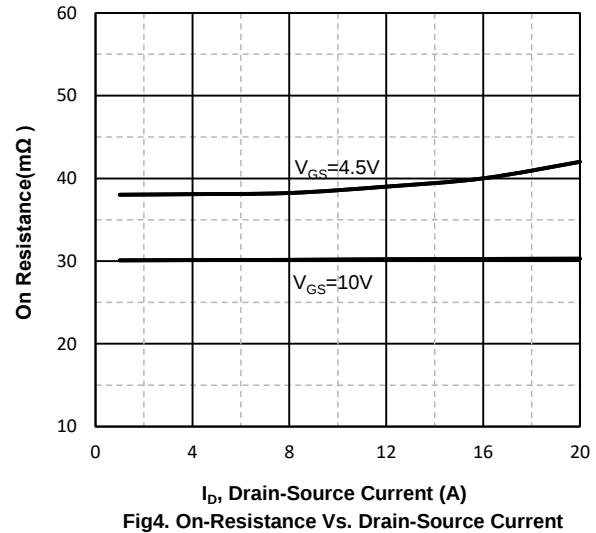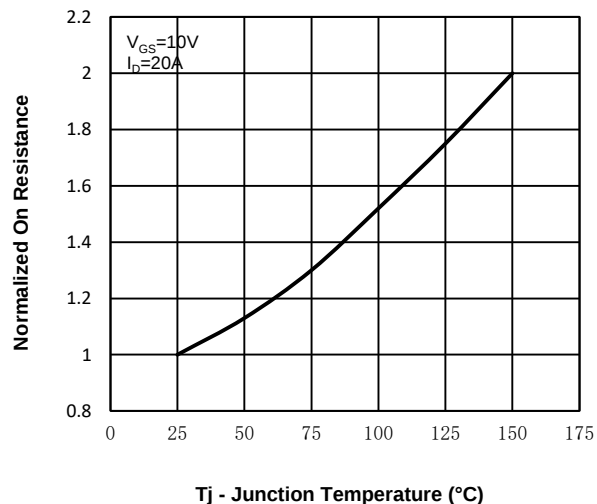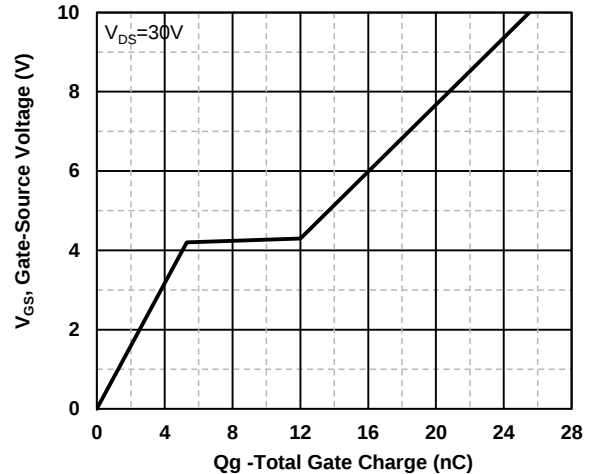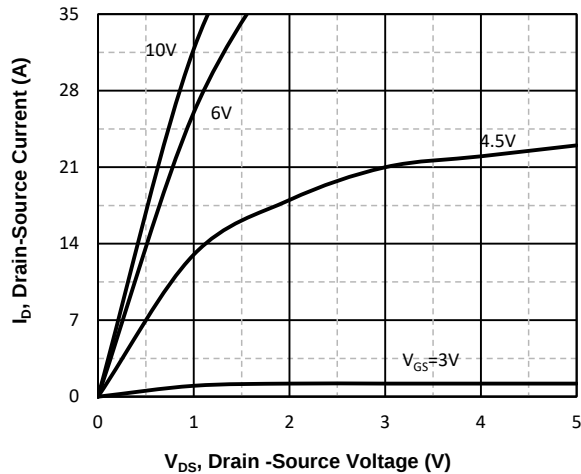

P-Channel Typical Operating Characteristics

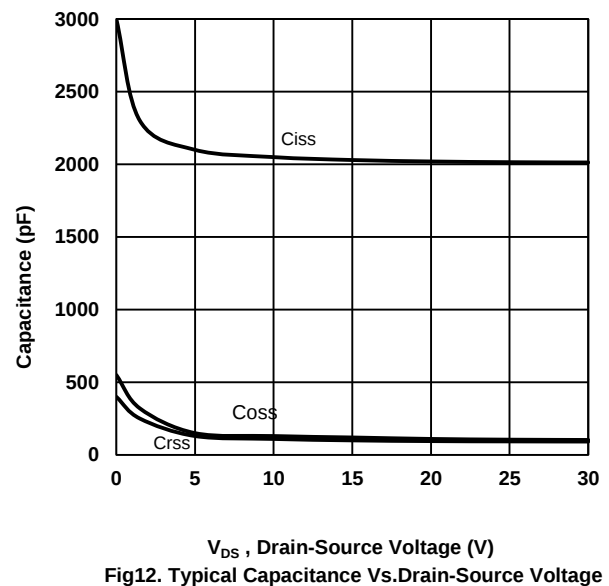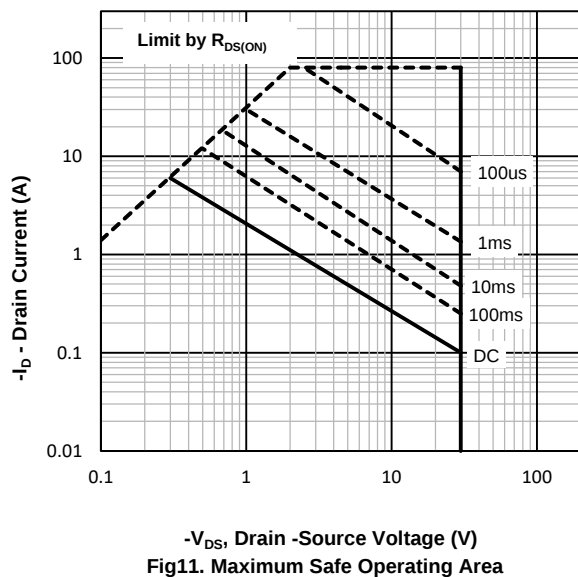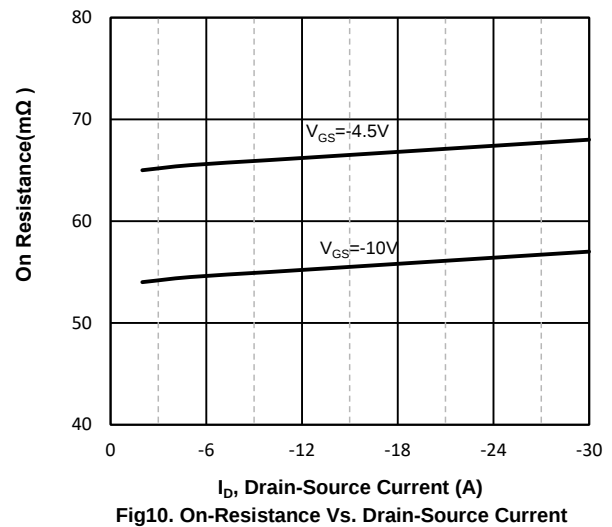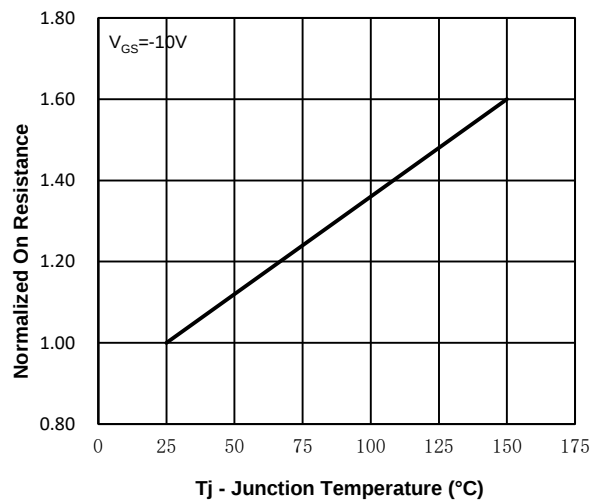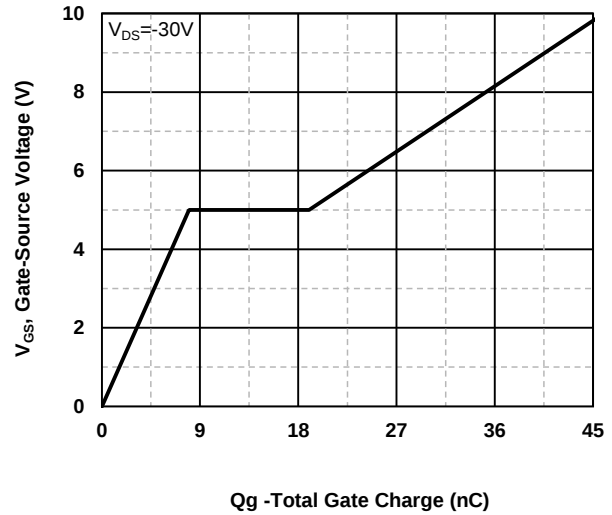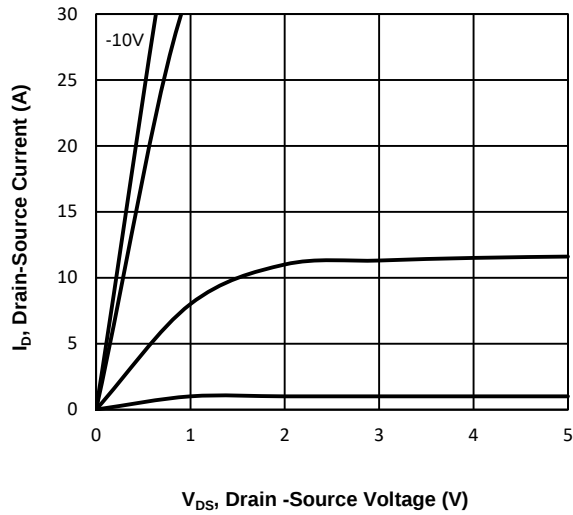

PDFN3X3-8L Package information

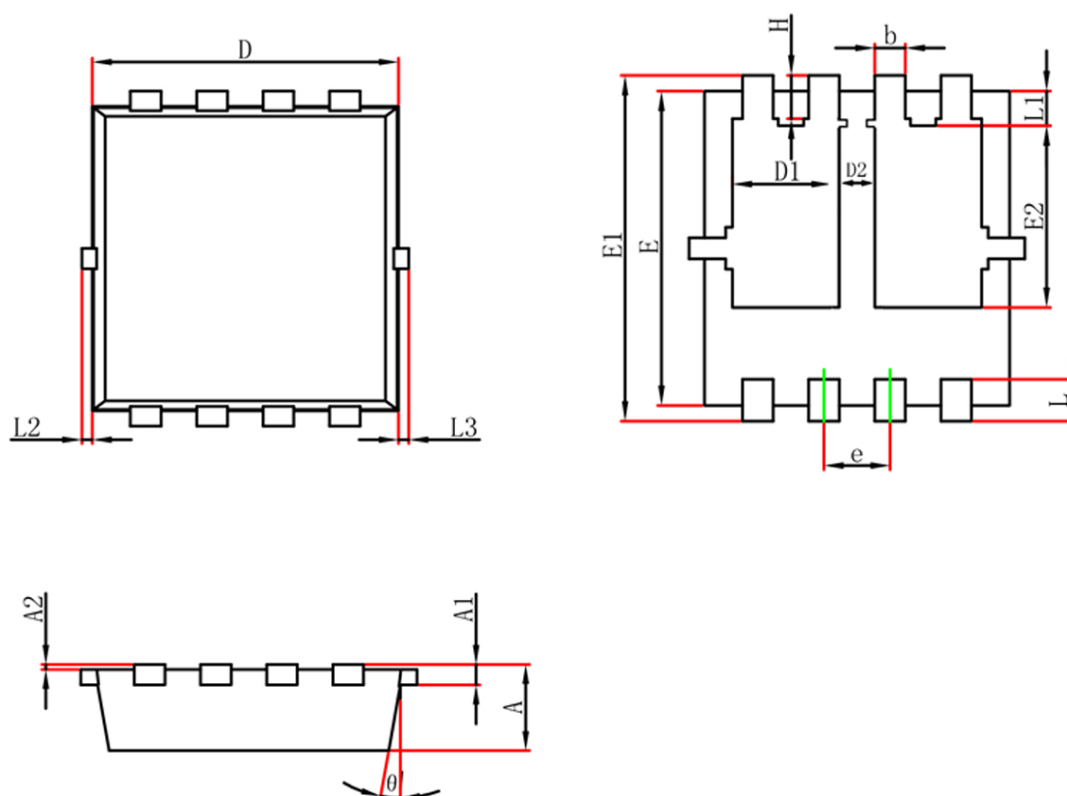

Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	0.750	0.850	0.030	0.034
A1	0.152 REF.		0.006 REF.	
A2	0~0.05		0~0.002	
D	3.050	3.150	0.121	0.125
D1	0.985	1.085	0.039	0.043
D2	0.330	0.430	0.013	0.017
E	2.950	3.050	0.117	0.121
E1	3.250	3.350	0.129	0.132
E2	1.685	1.785	0.067	0.071
b	0.250	0.350	0.010	0.014
e	0.600	0.700	0.024	0.028
L	0.350	0.450	0.014	0.018
L1	0.280	0.380	0.011	0.015
L2	0~0.100		0~0.004	
L3	0~0.100		0~0.004	
H	0.350	0.450	0.014	0.018
θ	9°	13°	10°	12°