MLSL6802A

30V/4A Dual N-Channel MOSFET

Features


- Dual N-Channel
- TrenchFET Power MOSFET
- Low Gate Charge
- Low On-resistance
- Surface Mount Package

Application


- Battery protection
- Load switch
- Power management

Product Summary


V_{DS}	$R_{DS(ON)}$ TYP	I_D
30V	37mΩ@10V	4A
	45mΩ@4.5V	



SOT-23-6L top view



Schematic diagram

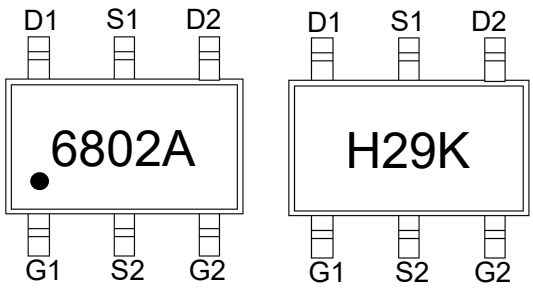

Marking and pin assignment

Pb-Free RoHS Halogen-Free

Absolute Maximum Ratings (TA=25℃unless otherwise noted)

Symbol	Parameter		Rating	Unit
Common Ratings (TC=25°C Unless Otherwise Noted)				
V_{DS}	Drain-Source Breakdown Voltage		30	V
V_{GS}	Gate-Source Voltage		±20	V
T_J	Maximum Junction Temperature		150	°C
T_{STG}	Storage Temperature Range		-50 to 155	°C
I_S	Diode Continuous Forward Current	Tc=25°C	4	A
Mounted on Large Heat Sink				
I_{DM}	Pulse Drain Current Tested	Tc=25°C	16	A
I_D	Continuous Drain Current	Tc=25°C	4	A
P_D	Maximum Power Dissipation	Tc=25°C	1	W
$R_{\theta JA}$	Thermal Resistance Junction-Ambient		125	°C/W

Ordering Information (Example)

Type	Package	Marking	Minimum Package(pcs)	Inner Box Quantity(pcs)	Outer Carton Quantity(pcs)	Delivery Mode
MLSL6802A	SOT-23-6L	6802A/H29K	3,000	45,000	180,000	7"reel

Copyright©MLS Microelectronics Co., Ltd

Electrical Characteristics (TJ=25℃ unless otherwise noted)						
Symbol	**Parameter**	**Condition**	**Min**	**Typ**	**Max**	**Unit**
Static Electrical Characteristics @ TJ = 25°C (unless otherwise stated)						
$BV_{(BR)DSS}$	Drain-Source Breakdown Voltage	V_{GS}=0V，I_D=250μA	30	--	--	V
I_{DSS}	Zero Gate Voltage Drain Current	V_{DS}=30V，V_{GS}=0V	--	--	1	μA
I_{GSS}	Gate-Body Leakage Current	V_{GS}=±20V，V_{DS}=0V	--	--	±100	nA
$V_{GS(th)}$	Gate Threshold Voltage	V_{DS}=V_{GS}，I_D=250μA	1.0	1.5	2.5	V
$R_{DS(on)}$	Drain-Source On-State Resistance	V_{GS}=10V， I_D=4.0A	--	37	50	mΩ
		V_{GS}=4.5V，I_D=3.5A	--	45	80	mΩ
Dynamic Electrical Characteristics @ TJ = 25°C (unless otherwise stated)						
C_{ISS}	Input Capacitance	V_{DS}=15V，V_{GS}=0V， f=1MHz	--	234	--	pF
C_{OSS}	Output Capacitance		--	42	--	pF
C_{RSS}	Reverse Transfer Capacitance		--	36	--	pF
Q_g	Total Gate Charge	V_{DS}=15V，I_D=4A，V_{GS}=10V	--	3	--	nC
Q_{gs}	Gate Source Charge		--	0.5	--	nC
Q_{gd}	Gate Drain Charge		--	0.7	--	nC
Switching Characteristics						
$t_{d(on)}$	Turn-on Delay Time	V_{DS}=15V，I_D=4A，V_{GS}=10V，R_G=3Ω	--	3.9	--	nS
t_r	Turn-on Rise Time		--	2.2	--	nS
$t_{d(off)}$	Turn-Off Delay Time		--	15.3	--	nS
t_f	Turn-Off Fall Time		--	3.3	--	nS
Source- Drain Diode Characteristics						
V_{SD}	Forward on voltage	Tj=25℃，Is=4A	--	--	1.2	V

Copyright©MLS Microelectronics Co., Ltd

Typical Operating Characteristics

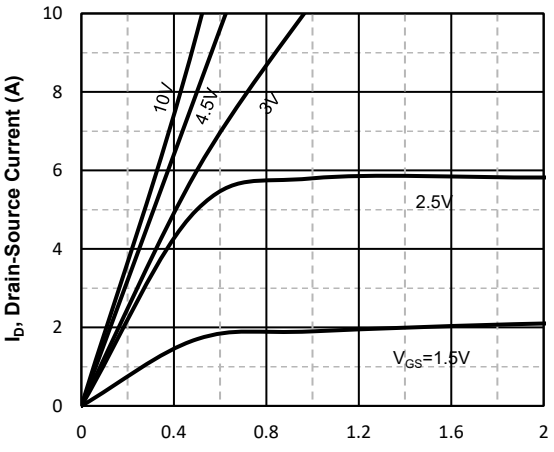


Fig1. Typical Output Characteristics

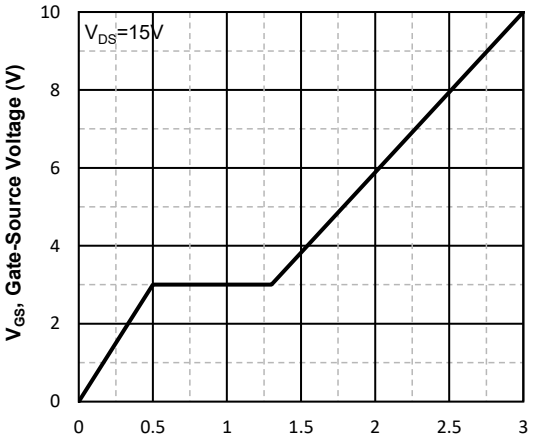


Fig2. Typical Gate Charge Vs.Gate-Source Voltage

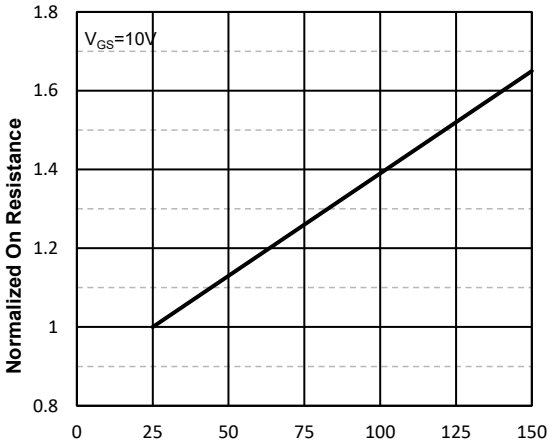


Fig3. Normalized On-Resistance Vs. Temperature

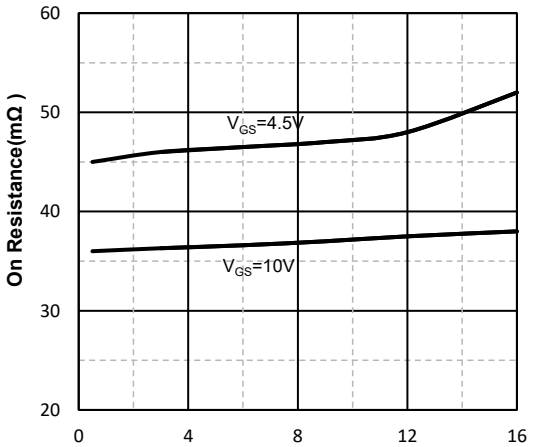


Fig4. On-Resistance Vs. Drain-Source Current

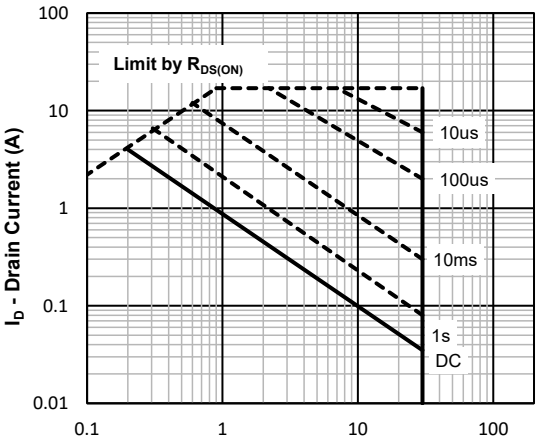


Fig5. Maximum Safe Operating Area


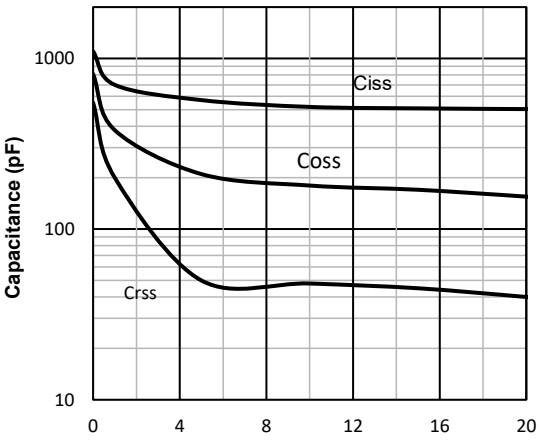


Fig6 Typical Capacitance Vs.Drain-Source Voltage

Copyright©MLS Microelectronics Co., Ltd

SOT-23-6L Package information

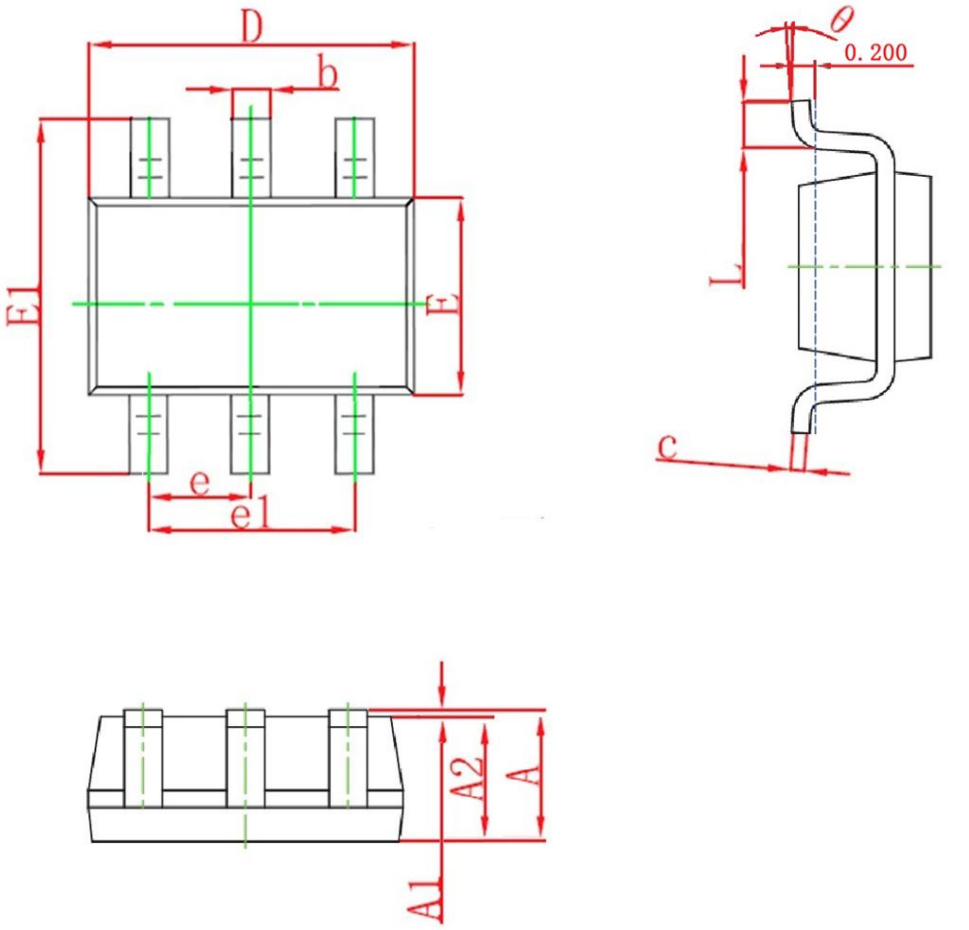

Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.000	1.200	0.039	0.047
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.600	3.000	0.102	0.118
e	0.950TYP		0.037TYP	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
K	0°	8°	0°	8°

Copyright©MLS Microelectronics Co., Ltd