

Features

- High Power and current handing capability
- Lead free product is acquired

Product Summary

V_{DS}	$R_{DS(ON)}$ TYP	I_D
250V	0.98Ω@10V	5A

Application

- Power switching application
- Hard switched and high frequency circuits




MU2F05A: Device code
XXXX: Code

Marking and pin assignment



TO-252 top view



Schematic diagram



Halogen-Free

Absolute Maximum Ratings (TA=25°C unless otherwise noted)

Symbol	Parameter	Rating	Unit
Common Ratings (TC=25°C Unless Otherwise Noted)			
V_{DS}	Drain-Source Breakdown Voltage	250	V
V_{GS}	Gate-Source Voltage	±20	V
T_J	Maximum Junction Temperature	150	°C
T_{STG}	Storage Temperature Range	-50 to 155	°C
I_S	Diode Continuous Forward Current	$T_c=25^\circ\text{C}$ 5	A
Mounted on Large Heat Sink			
I_{DM}	Pulse Drain Current Tested	$T_c=25^\circ\text{C}$ 14	A
I_D	Continuous Drain Current	$T_c=25^\circ\text{C}$ 5	A
P_D	Maximum Power Dissipation	$T_c=25^\circ\text{C}$ 38	W
E_{AS}	Avalanche energy ^{Note 1}	6.25	mJ







Ordering Information (Example)

Type	Package	Marking	Minimum Package(pcs)	Inner Box Quantity(pcs)	Outer Carton Quantity(pcs)	Delivery Mode
MU2F05A	TO-252	MU2F05A	2,500	5,000	35,000	13"reel


Electrical Characteristics (TJ=25°C unless otherwise noted)						
Symbol	Parameter	Condition	Min	Typ	Max	Unit
Static Electrical Characteristics @ TJ = 25°C (unless otherwise stated)						
BV _{(BR)DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =250μA	250	--	--	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =250V, V _{GS} =0V	--	--	1	uA
I _{GSS}	Gate-Body Leakage Current	V _{GS} =±20V, V _{DS} =0V	--	--	±100	nA
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =250μA	1.0	1.8	3.0	V
R _{DS(on)}	Drain-Source On-State Resistance	V _{GS} =10V, I _D =1A	--	0.98	1.2	Ω
Dynamic Electrical Characteristics @ TJ = 25°C (unless otherwise stated)						
C _{ISS}	Input Capacitance	V _{DS} =25V, V _{GS} =0V, f=1MHz	--	770	--	pF
C _{OSS}	Output Capacitance		--	9.5	--	pF
C _{RSS}	Reverse Transfer Capacitance		--	2.1	--	pF
Switching Characteristics						
Q _g	Total Gate Charge	V _{DS} =160V, I _D =5A, V _{GS} =10V	--	17	--	nC
Q _{gs}	Gate Source Charge		--	2.5	--	nC
Q _{gd}	Gate Drain Charge		--	7	--	nC
t _{d(on)}	Turn-on Delay Time	V _{DD} =100V, I _D =5A, R _G =25Ω	--	10	--	nS
t _r	Turn-on Rise Time		--	6	--	nS
t _{d(off)}	Turn-Off Delay Time		--	15	--	nS
t _f	Turn-Off Fall Time		--	5	--	nS
Source- Drain Diode Characteristics						
V _{SD}	Forward on voltage	Tj=25°C, Is=4A,	--	--	1.2	V

Note: 1.EAS condition: T_J=25°C,V_{DD}=40V,V_G=10V, R_G=25Ω, L=0.5mH.

Typical Operating Characteristics

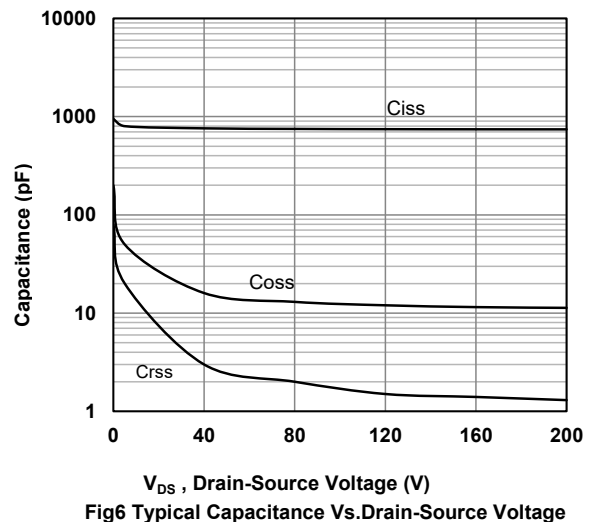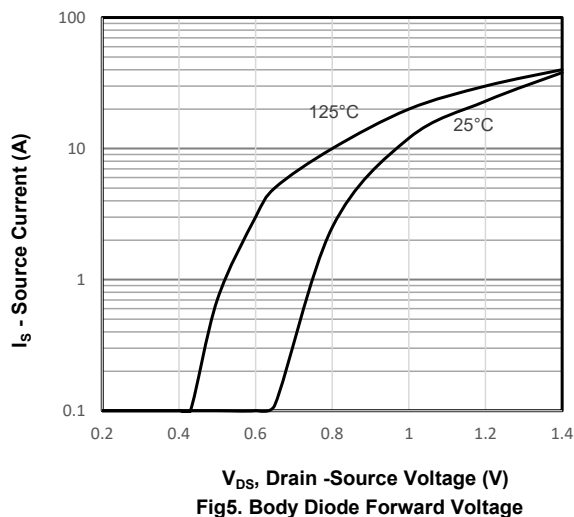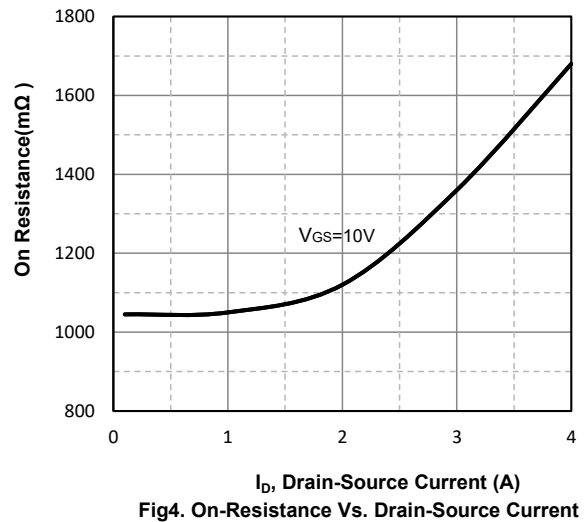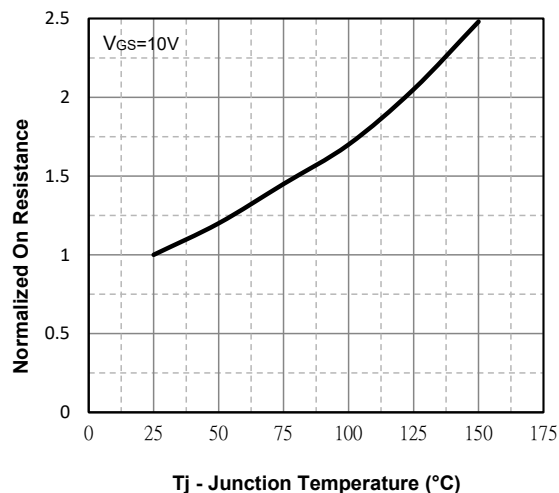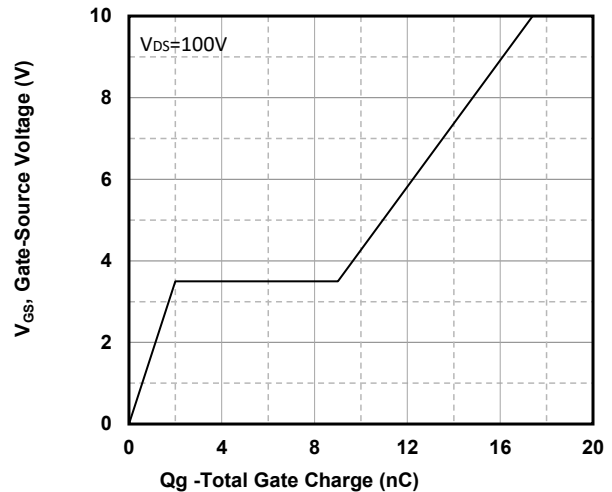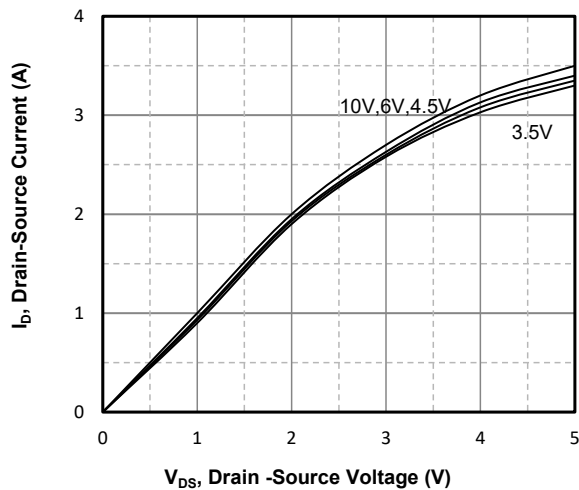

TO-252 Package information

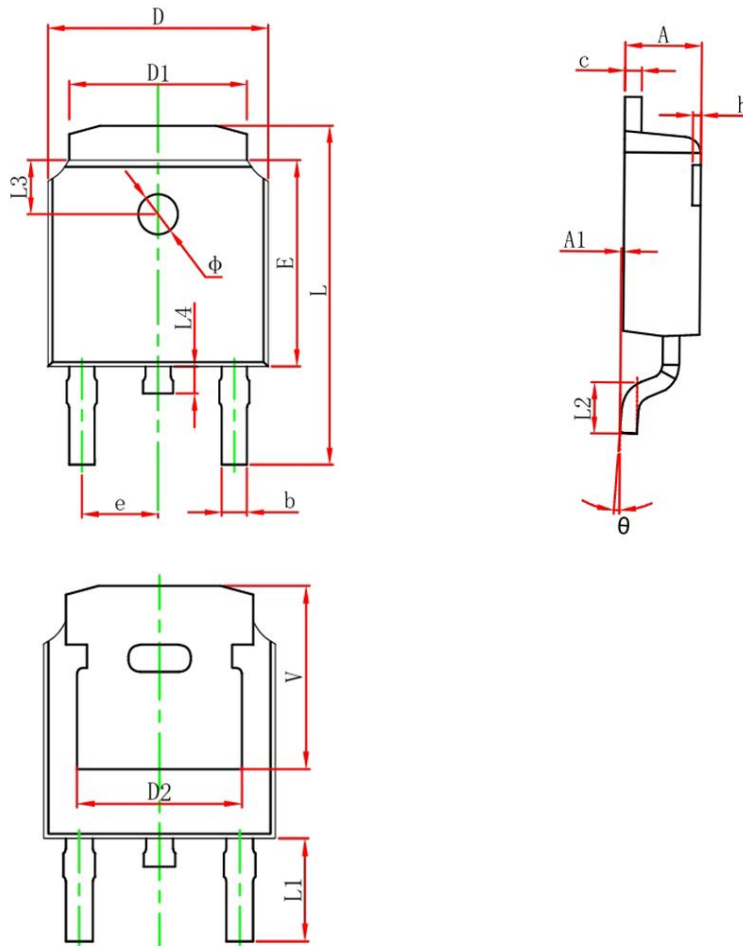

Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	2.200	2.400	0.087	0.094
A1	0.000	0.127	0.000	0.005
b	0.635	0.770	0.025	0.030
c	0.450	0.580	0.018	0.023
D	6.500	6.700	0.256	0.264
D1	5.100	5.460	0.201	0.215
D2	4.830 REF.		0.190 REF.	
E	6.000	6.200	0.236	0.244
e	2.186	2.386	0.086	0.094
L	9.712	10.312	0.386	0.406
L1	2.900 REF.		0.114 REF.	
L2	1.400	1.700	0.055	0.067
L3	1.600 REF.		0.063 REF.	
L4	0.600	1.000	0.024	0.039
Φ	1.100	1.300	0.043	0.051
θ	0°	8°	0°	8°
h	0.000	0.300	0.000	0.012
V	5.250 REF.		0.207 REF.	