

Features


- Leading trench technology for low $R_{DS(on)}$
- Low Gate Charge

Product Summary

V_{DS}	$R_{DS(on)}$ MAX	I_D MAX
-30V	130mΩ@-10V	-4.3A
	180mΩ@-4.5V	


Application

- Video monitor
- Power management



2623A: Device code

Marking and pin assignment

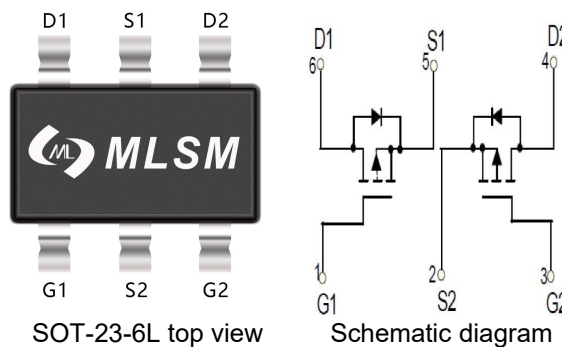

Halogen-Free

Absolute Maximum Ratings (TA=25°C unless otherwise noted)

Symbol	Parameter	Rating	Unit
--------	-----------	--------	------

Common Ratings (TC=25°C Unless Otherwise Noted)

V _{DS}	Drain-Source Breakdown Voltage		-30	V
V _{GS}	Gate-Source Voltage		±20	V
T _J	Maximum Junction Temperature		150	°C
T _{STG}	Storage Temperature Range		-55 to 150	°C
I _S	Diode Continuous Forward Current	Tc=25°C	-4.3	A

Mounted on Large Heat Sink

I_{DM}	Pulse Drain Current Tested	$T_c=25^\circ\text{C}$	-16	A
I_D	Continuous Drain Current	$T_c=25^\circ\text{C}$	-4.3	A
P_D	Maximum Power Dissipation	$T_c=25^\circ\text{C}$	1.25	W
$R_{\theta JA}$	Thermal Resistance Junction-to-Ambient		150	°C/W

Ordering Information (Example)

Type	Package	Marking	Minimum Package(pcs)	Inner Box Quantity(pcs)	Outer Carton Quantity(pcs)	Delivery Mode
MLSL2623A	SOT-23-6L	2623A	3,000	45,000	180,000	7"reel

Electrical Characteristics (T_J=25°C unless otherwise noted)

Symbol	Parameter	Condition	Min	Typ	Max	Unit
--------	-----------	-----------	-----	-----	-----	------

Static Electrical Characteristics @ T_J = 25°C (unless otherwise stated)

BV _{(BR)DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =-250μA	-30	--	--	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =-30V, V _{GS} =0V	--	--	-1	μA
I _{GSS}	Gate-Body Leakage Current	V _{GS} =±20V, V _{DS} =0V	--	--	±100	nA
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =-250μA	-1.0	-1.5	-3.0	V
R _{DS(on)}	Drain-Source On-State Resistance	V _{GS} =-10V, I _D =-4.3A	--	75	130	mΩ
		V _{GS} =-4.5V, I _D =-4.0A	--	115	180	mΩ

Dynamic Electrical Characteristics @ T_J = 25°C (unless otherwise stated)

C _{ISS}	Input Capacitance	V _{DS} =-15V, V _{GS} =0V, f=1MHz	--	260	--	pF
C _{OSS}	Output Capacitance		--	50	--	pF
C _{RSS}	Reverse Transfer Capacitance		--	40	--	pF

Switching Characteristics

Q _g	Total Gate Charge	V _{DS} =-15V, I _D =-4.3A, V _{GS} =-10V	--	7	--	nC
Q _{gs}	Gate Source Charge		--	2	--	nC
Q _{gd}	Gate Drain Charge		--	1	--	nC
t _{d(on)}	Turn-on Delay Time	V _{DS} =-15V, I _D =-4.3A, V _{GS} =-10V, R _G =3Ω	--	5	--	nS
t _r	Turn-on Rise Time		--	23	--	nS
t _{d(off)}	Turn-Off Delay Time		--	21	--	nS
t _f	Turn-Off Fall Time		--	30	--	nS

Source- Drain Diode Characteristics

V _{SD}	Forward on voltage	T _J =25°C, I _S =-4.3A	--	--	-1.2	V
-----------------	--------------------	---	----	----	------	---

Typical Operating Characteristics

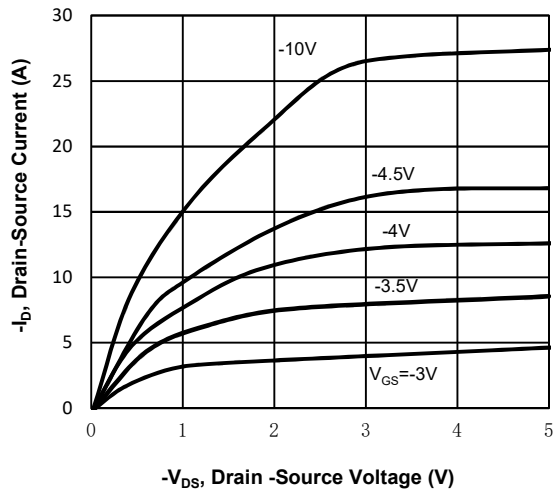


Fig1. Typical Output Characteristics

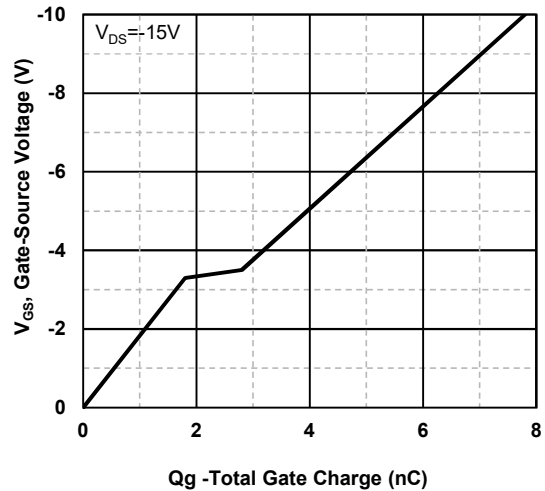


Fig2. Typical Gate Charge Vs. Gate-Source Voltage

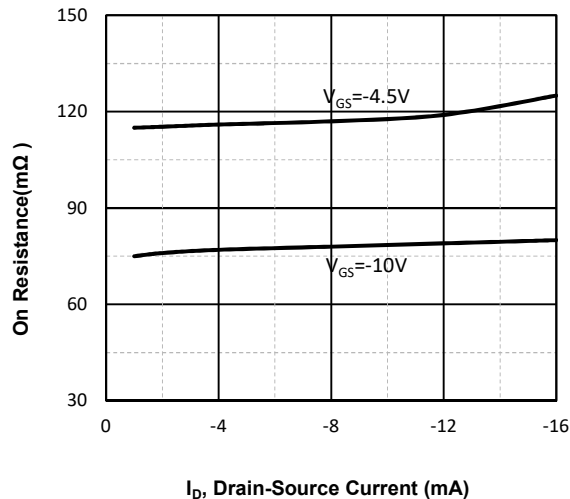


Fig3. On Resistance Vs. Drain-Source Current

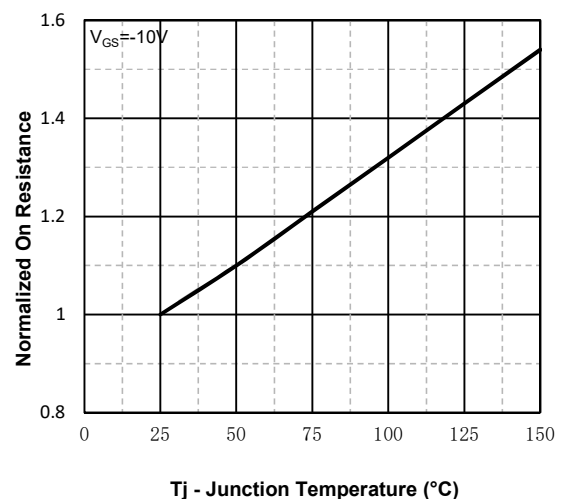


Fig4. Normalized On-Resistance Vs. Temperature

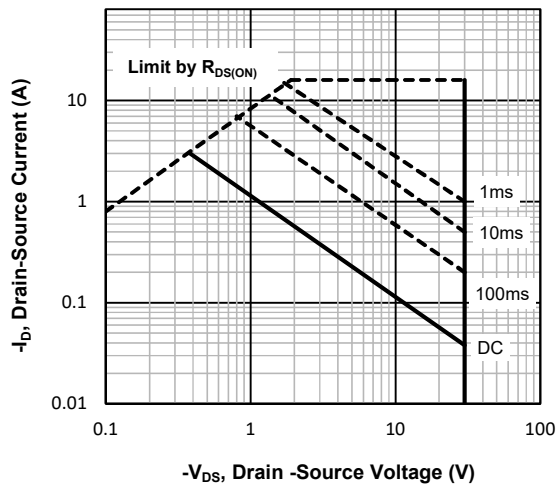


Fig5. Maximum Safe Operating Area


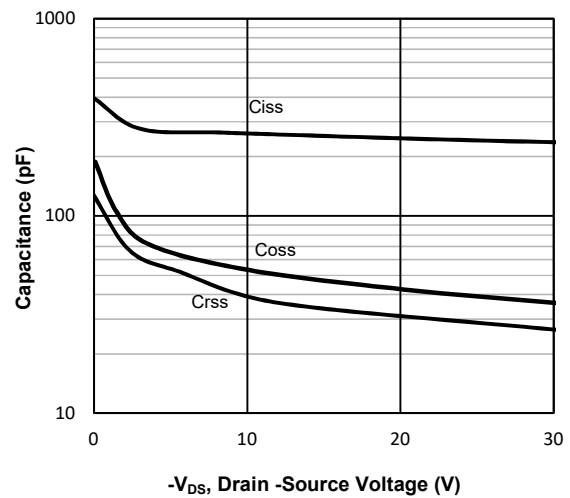


Fig6 Typical Capacitance Vs. Drain-Source Voltage

SOT-23-6L Package information

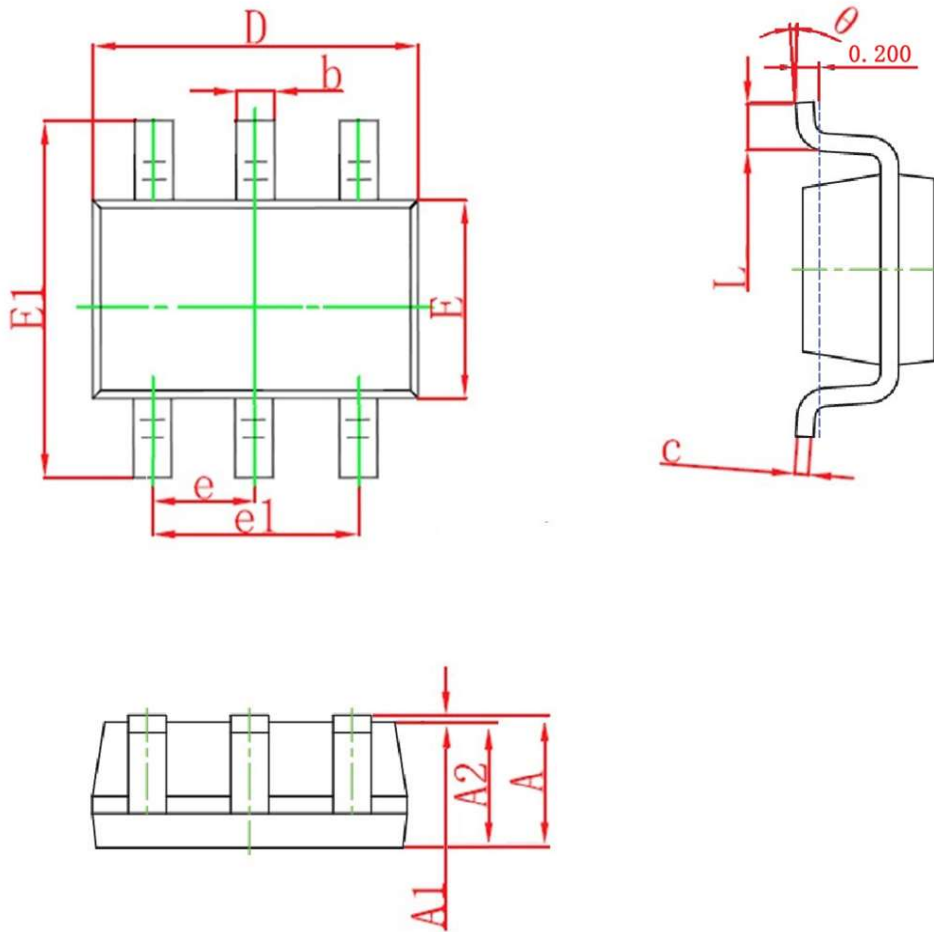

Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	1.050	1.250	0.041	0.049
A1	0.000	0.100	0.000	0.004
A2	1.000	1.200	0.039	0.047
b	0.300	0.500	0.012	0.020
c	0.100	0.200	0.004	0.008
D	2.820	3.020	0.111	0.119
E	1.500	1.700	0.059	0.067
E1	2.600	3.000	0.102	0.118
e	0.950TYP		0.037TYP	
e1	1.800	2.000	0.071	0.079
L	0.300	0.600	0.012	0.024
K	0°	8°	0°	8°