

Features


- High density cell design for ultra low $R_{DS(ON)}$
- Fully characterized avalanche voltage and current
- Good stability and uniformity with high E_{AS}
- Excellent package for good heat dissipation

Product Summary

V_{DS}	$R_{DS(ON)}$ MAX	I_D MAX
150V	300mΩ@10V	3A
	380mΩ@4.5V	



Application

- Power switching application



1F03A: Device code
 XXXX: Code

Marking and pin assignment



Halogen-Free

Absolute Maximum Ratings (TA=25°C unless otherwise noted)

Symbol	Parameter	Rating	Unit
--------	-----------	--------	------

Common Ratings (TC=25°C Unless Otherwise Noted)

V_{DS}	Drain-Source Breakdown Voltage	150	V
V_{GS}	Gate-Source Voltage	±20	V
T_J	Maximum Junction Temperature	150	°C
T_{STG}	Storage Temperature Range	-50 to 155	°C
I_S	Diode Continuous Forward Current	$T_C=25^{\circ}C$ 3	A

Mounted on Large Heat Sink

I_{DM}	Pulse Drain Current Tested	$T_C=25^{\circ}C$ 8	A
I_D	Continuous Drain Current	$T_C=25^{\circ}C$ 3	A
P_D	Maximum Power Dissipation	$T_C=25^{\circ}C$ 8	W
$R_{\theta JA}$	Thermal Resistance Junction-Ambient	125	°C/W

Ordering Information (Example)

Type	Package	Marking	Minimum Package(pcs)	Inner Box Quantity(pcs)	Outer Carton Quantity(pcs)	Delivery Mode
MT1F03A	SOT-223	1F03A	2,500	5,000	35,000	13"reel

Electrical Characteristics (T_J=25°C unless otherwise noted)

Symbol	Parameter	Condition	Min	Typ	Max	Unit
Static Electrical Characteristics @ T_J = 25°C (unless otherwise stated)						
BV _{(BR)DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =250μA	150	--	--	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =150V, V _{GS} =0V	--	--	1	μA
I _{GSS}	Gate-Body Leakage Current	V _{GS} =±20V, V _{DS} =0V	--	--	±100	nA
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =250μA	1.5	--	2.5	V
R _{DS(on)}	Drain-Source On-State Resistance	V _{GS} =10V, I _D =3A	--	260	300	mΩ
		V _{GS} =4.5V, I _D =2A	--	280	380	mΩ

Dynamic Electrical Characteristics @ T_J = 25°C (unless otherwise stated)

C _{ISS}	Input Capacitance	V _{DS} =75V, V _{GS} =0V, f=1MHz	--	465	--	pF
C _{OSS}	Output Capacitance		--	23	--	pF
C _{RSS}	Reverse Transfer Capacitance		--	14	--	pF

Switching Characteristics

Q _g	Total Gate Charge	V _{DS} =75V, I _D =2A, V _{GS} =10V	--	14	--	nC
Q _{gs}	Gate Source Charge		--	1.6	--	nC
Q _{gd}	Gate Drain Charge		--	4	--	nC
t _{d(on)}	Turn-on Delay Time	V _{DD} =75V, I _D =2A, V _{GS} =10V, R _G =3Ω	--	5.8	--	nS
t _r	Turn-on Rise Time		--	2.2	--	nS
t _{d(off)}	Turn-Off Delay Time		--	16.9	--	nS
t _f	Turn-Off Fall Time		--	2.6	--	nS

Source- Drain Diode Characteristics

V _{SD}	Forward on voltage	T _J =25°C, I _S =2A	--	--	1.2	V
-----------------	--------------------	--	----	----	-----	---

Typical Operating Characteristics

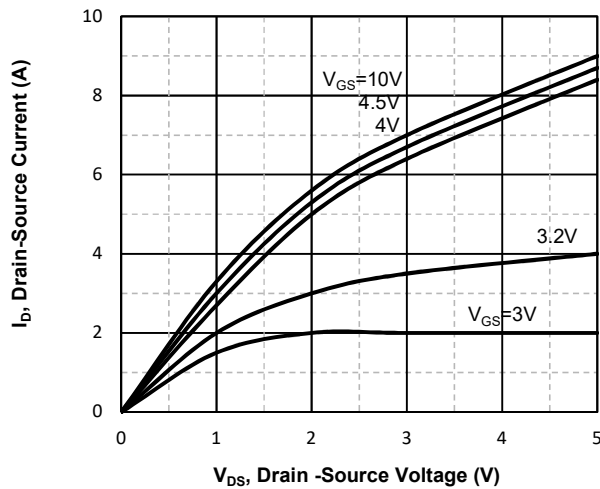


Fig1. Typical Output Characteristics

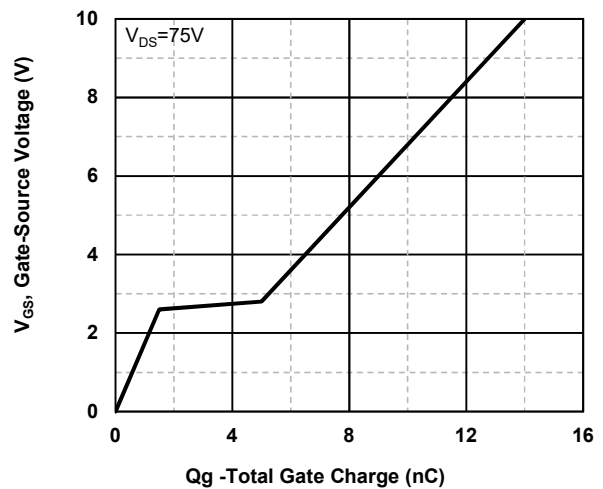


Fig2. Typical Gate Charge Vs. Gate-Source Voltage

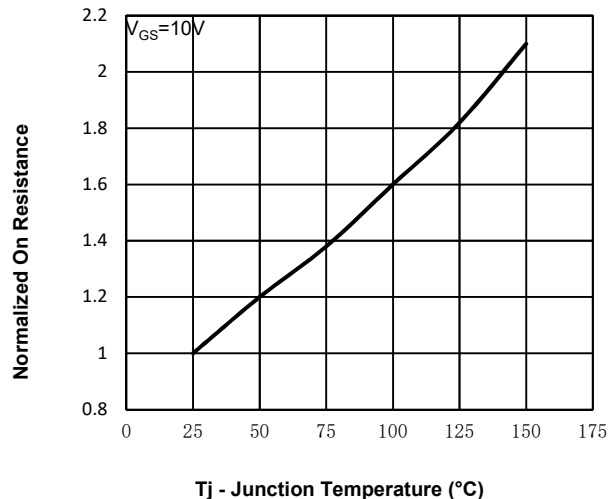


Fig3. Normalized On-Resistance Vs. Temperature

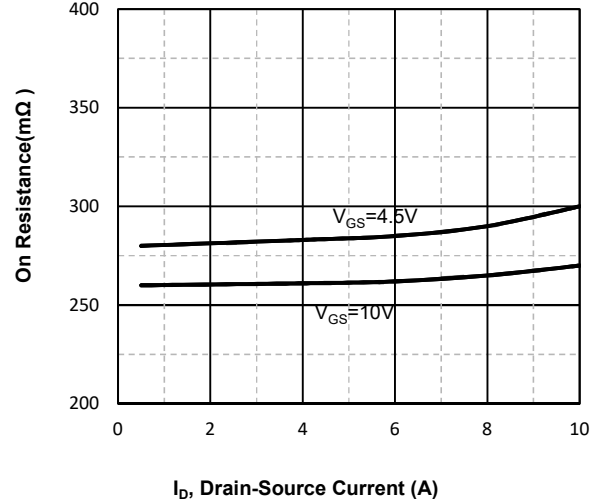


Fig4. On-Resistance Vs. Drain-Source Current

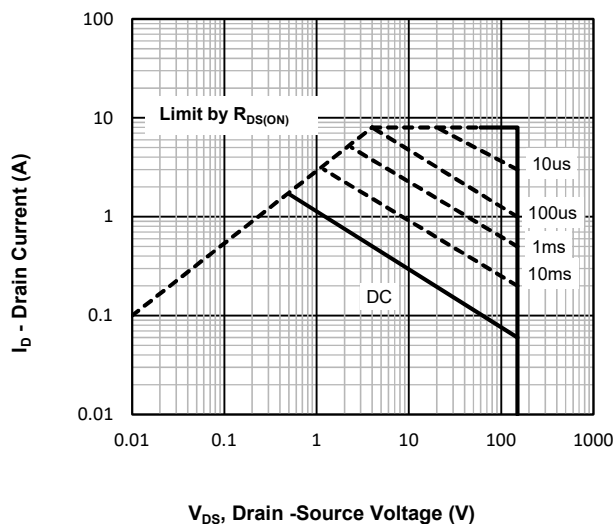


Fig5. Maximum Safe Operating Area



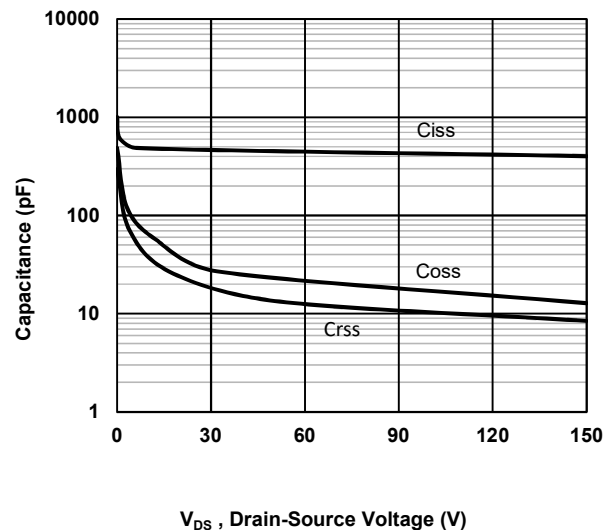


Fig6 Typical Capacitance Vs. Drain-Source

SOT-223 Package information

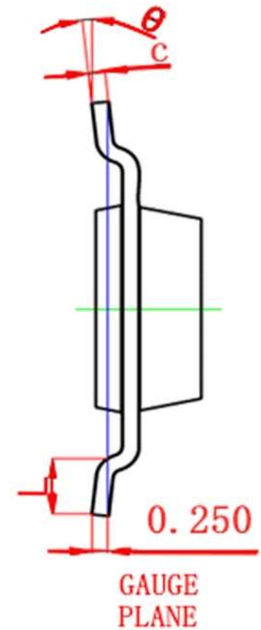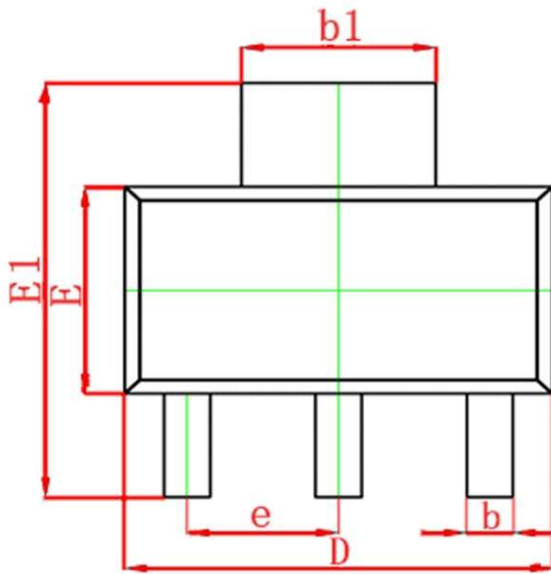

Symbol	Dimensions in Millimeters(mm)		Dimensions In Inches	
	Min	Max	Min	Max
A	--	1.800	--	0.071
A1	0.020	0.100	0.001	0.004
A2	1.500	1.700	0.059	0.067
b	0.660	0.840	0.026	0.033
b1	2.900	3.100	0.114	0.122
c	0.230	0.350	0.009	0.014
D	6.300	6.700	0.248	0.264
E	3.300	3.700	0.130	0.146
E1	6.700	7.300	0.264	0.287
e	2.300(BSC)		0.091(BSC)	
L	0.750	--	0.030	--
θ	0°	10°	0°	10°